



GPH

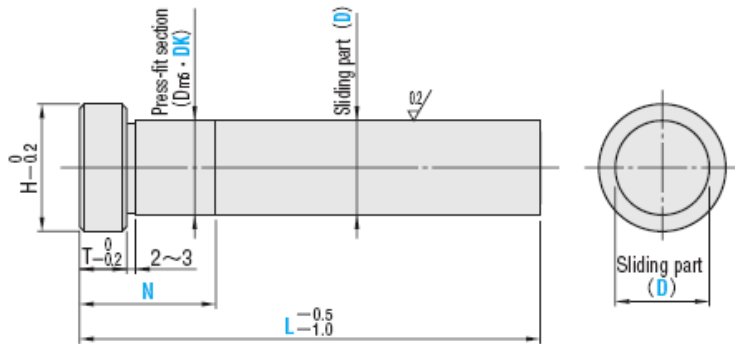

GPHE

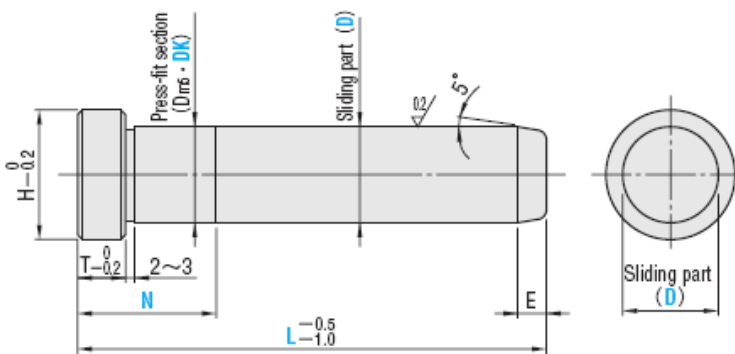

E:3~10mm

- SUJ2
- 58HRC~ (Induction hardening)

Sliding parts Df6		Press-fit section Dm6		T	H	Type	D	L 5mm increments	N 1mm increments
8	-0.013	8	+0.015	5	11	GPH GPHE	8	30~80	5~60
10	-0.022	10	+0.006		13				
12	-0.016	12	+0.018		17				
13		13	+0.007		18				
16	-0.027	16		8	21		16	30~250	8~80
20	-0.020	20	+0.021		25				
25		25	+0.008		30				
30	-0.033	30			35				
35	-0.025	35	+0.025		40				
40		40	+0.009		45				
50	-0.041	50		10	45		40	80~500	10~200
60	-0.030	60	+0.030	12	55		50	100~500	12~200
	-0.049		+0.011	15	65	60	200~500	15~200	



Type - D - L - N

GPH - D30 - L250 - N40