


Catalog No.	M	H
STA	SKD11	59~62HRC
HSTA	SKH51	62~64HRC

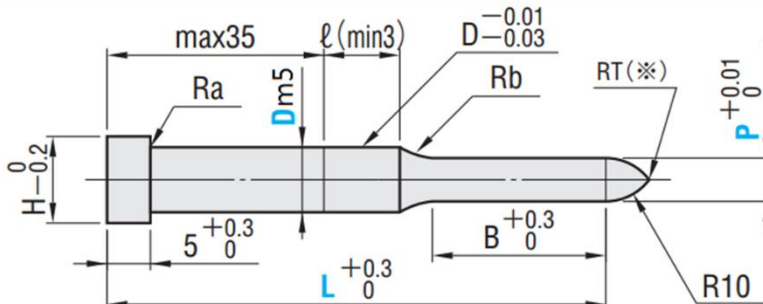

Ⓜ RT(\*) → If  $P \geq 8$ , tip end is flat.  
 $P \geq 8$ 时, 前端为平面

D	Ra	Rb
$D \geq 3$	$\leq 0.5$	10
$D < 3$	$\leq 0.2$	2

Catalog No.			L							0.01mm increments		B	H	
Type	B tip length	D								min. P				max.
STA (SKD11)	S	1.6	42	52	62					0.30 ~ 1.59	(6)	2.6		
		2.0	42	52	62					0.50 ~ 1.99	8	3		
		2.5	42	52	62					1.00 ~ 2.49		3.5		
		3	42	52	62	72	82	(92)			1.00 ~ 2.99	10	5	
		4	42	52	62	72	82	(92)			1.00 ~ 3.99		7	
		5	42	52	62	72	82	(92)			2.00 ~ 4.99		8	
		6	42	52	62	72	82	(92)			2.50 ~ 5.99		9	
		8	(42)	52	62	72	82	(92)	(102)	(112)	3.00 ~ 7.99	15	11	
		10	(42)	52	62	72	82	(92)	(102)	(*)	3.00 ~ 9.99		13	
		13	(42)	52	62	72	82	(92)	(102)	(*)	6.00 ~ 12.99	21	16	
	16	(42)	52	62	72	82	(92)	(102)	(*)	10.00 ~ 15.99		19		
	20	(42)	52	62	72	82	(92)	(102)	(*)	13.00 ~ 19.99		23		
	25	(42)	52	62	72	82	(92)	(102)	(*)	18.00 ~ 24.99		28		
	HSTA (SKH51)	L	1.6	42	52	62					0.50 ~ 1.59	8	2.6	
			2.0	42	52	62					0.50 ~ 1.99	10	3	
			2.5	42	52	62					1.00 ~ 2.49	13	3.5	
			3		52	62	72	82	(92)			1.00 ~ 2.99	15	5
			4		52	62	72	82	(92)			1.00 ~ 3.99		7
			5		52	62	72	82	(92)			2.00 ~ 4.99		8
			6		52	62	72	82	(92)			2.50 ~ 5.99		9
			8		52	62	72	82	(92)	(102)	(112)	3.00 ~ 7.99	21	11
			10		52	62	72	82	(92)	(102)	(*)	3.00 ~ 9.99		13
			13		52	62	72	82	(92)	(102)	(*)	6.00 ~ 12.99	27	16
	16			62	72	82	(92)	(102)	(*)	10.00 ~ 15.99		19		
	20			62	72	82	(92)	(102)	(*)	13.00 ~ 19.99		23		
25			62	72	82	(92)	(102)	(*)	18.00 ~ 24.99		28			
	X	3		52	62	72	82	(92)		1.20 ~ 2.99	21	5		
		4		52	62	72	82	(92)		1.20 ~ 3.99		7		
		5			62	72	82	(92)		2.00 ~ 4.99	27	8		
		6			62	72	82	(92)		2.50 ~ 5.99		9		
		8			62	72	82	(92)	(102)	(112)	3.00 ~ 7.99	32	11	
		10			62	72	82	(92)	(102)	(*)	3.00 ~ 9.99		13	
		13			62	72	82	(92)	(102)	(*)	6.00 ~ 12.99	42	16	
		16				72	82	(92)	(102)	(*)	10.00 ~ 15.99		19	
		20				72	82	(92)	(102)	(*)	13.00 ~ 19.99		23	
		25				72	82	(92)	(102)	(*)	18.00 ~ 24.99		28	

 Catalog No. - L - P  
 STAL6 - 52 - P4.50