
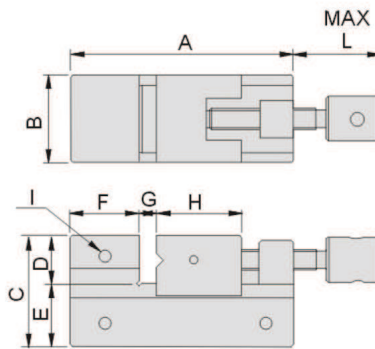


Material :SUS440 Parallelism:within 0.003mm/100mm  
 Hardness:HRC48°~55° Squareness:within 0.003mm/100mm

Unit:mm

### 52730 VSU10



▶ Screw rod design to lock tight, suitable for clamping small workpiece.

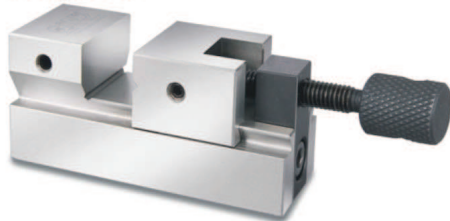

Spec	Model	VSU10
A		70
B		25
C		32
D		14
E		18
F		20
G		0~25
H		25
I		M4
L		43
N.W.		0.5kg

### 52735 VSU15



▶ Screw rod design to lock tight, suitable for clamping small workpiece.

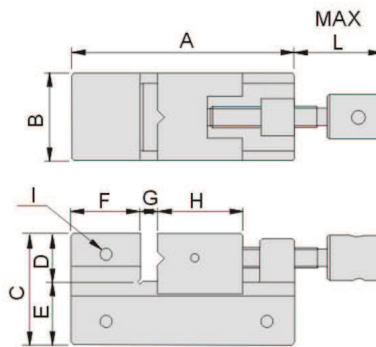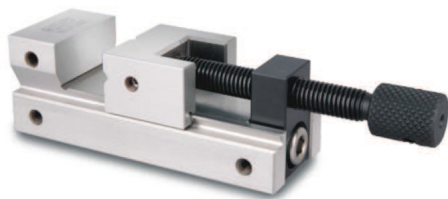

Spec	Model	VSU15
A		100
B		36
C		35
D		16.5
E		18.5
F		20
G		0~50
H		30
I		M5
L		76.5
N.W.		1.0kg

### 52740 VSU30



▶ Screw rod design to lock tight, suitable for clamping small workpiece to precision processing / grinding.

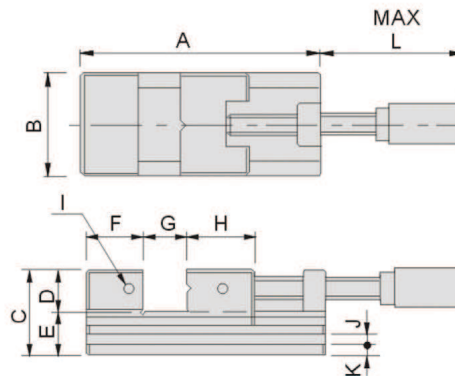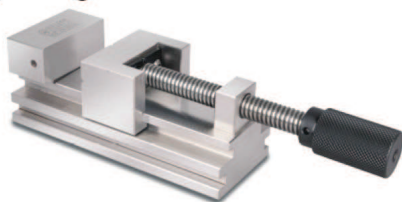

Spec	Model	VSU30
A		180
B		70
C		69
D		30
E		39
F		35
G		0~100
H		45
I		M6
J(WXD)		8x8
K		8
L		165.5
N.W.		4.2kg

### 52745 DSU80

▶ Compact structure, suitable for high precision processing work.

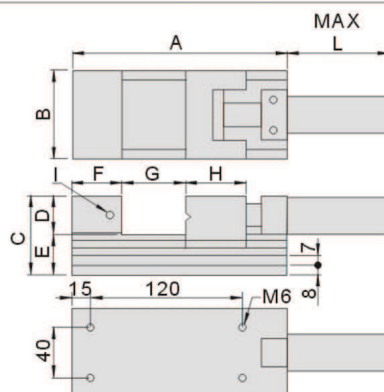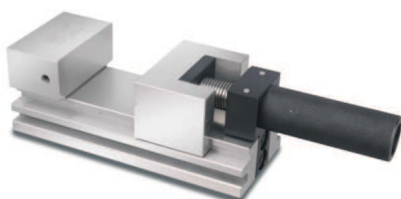

Spec	Model	DSU80
A		170
B		70
C		62
D		30
E		32
F		40
G		0~80
H		45
I		M6
L		82
N.W.		4.2kg

TOOL MAKER VISE