

Stainless Tool Maker Vise

Material : SUS440

Parallelism: within 0.003mm/100mm

Hardness: HRC48⁰~55⁰

Squareness: within 0.003mm/100mm



Unit: mm

52750

DSU20/30

52750-20 DSU20
52750-30 DSU30

- ▶ Screw rod design to lock tight, suitable for clamping small precision workpiece.

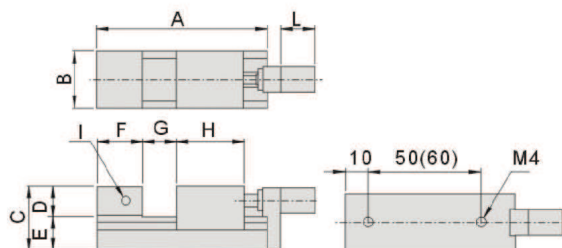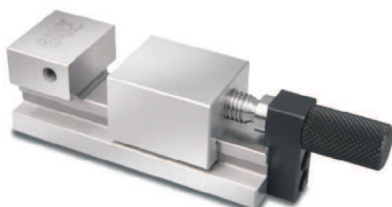



Spec	Model	DSU20	DSU30
A		75	95
B		25	30
C		28	35
D		13	15
E		15	20
F		20	20
G		0~20	0~30
H		30	40
I		M4	M4
L		20	20
N.W.		0.27kg	0.65kg

52755

DSU40/50

52755-40 DSU40
52755-50 DSU50

- ▶ Screw rod design to lock tight, suitable for clamping small precision workpiece.

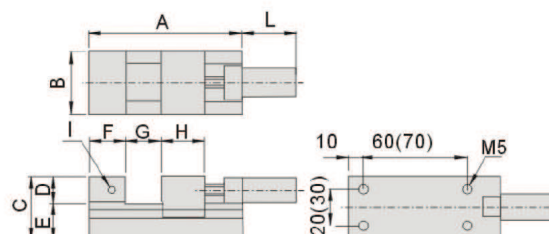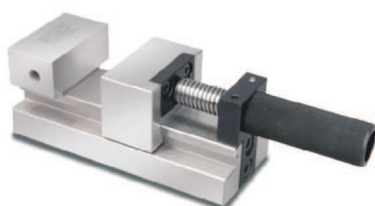


Spec	Model	DSU40	DSU50
A		95	110
B		35	45
C		35	45
D		15	20
E		20	25
F		20	25
G		0~40	0~50
H		24	24
I		M5	M5
L		45	55
N.W.		0.9kg	1.6kg

52760

PMV30

- ▶ Screw rod design to lock tight and has compact structure, suitable for clamping small workpiece to precision processing / grinding, especially on 5-axis machine center.


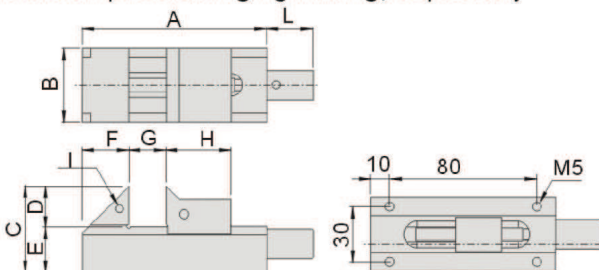


Spec	Model	PMV30
A		100
B		40
C		47
D		22
E		25
F		25
G		30
H		35
I		M4
L		31.5
N.W.		0.90kg

52765

PMV30F

- ▶ Screw rod design to lock tight and has compact structure, suitable for clamping small workpiece to precision processing / grinding, especially on 5-axis machine center.

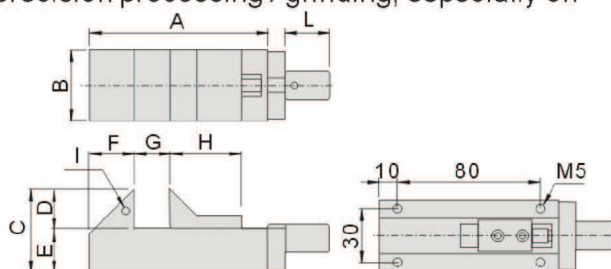

Spec	Model	PMV30F
A		100
B		40
C		47
D		22
E		25
F		25
G		30
H		40
I		M4
L		30
N.W.		0.93kg