
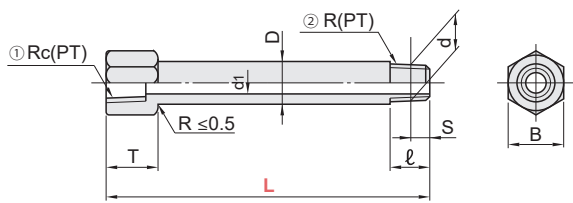


JOINT NIPPLES

HUAN SIN COMPANY LIMITED




JTW (Brass)
JTWS
(Stainless steel)




⚠ Use in atmospheric pressure 980kPa(10kgf/cm²) or lower
⚠ Thread part JIS B 0203 Tapered thread for tubing $R_{Rc}(PT)$

Ⓜ JTW Brass
JTWS Stainless steel

B	T	D	d ₁	l	S	d	① Rc(PT)	② R(PT)	Part Number		L	
									Type	No.	5mm Increments	10mm Increments
14	13	10.5	6	10	3.97	9.728	1/8	1/8	JTW	1	30 ~ 200	210 ~ 300
17	16	13.8	8	10	6.01	13.157	1/4	1/4	JTWS	2		
21	17	17.3	10	12	6.35	16.662	3/8	3/8	(L≤250)	3		




HX - JTW
Brass (Hexagonal hole type)

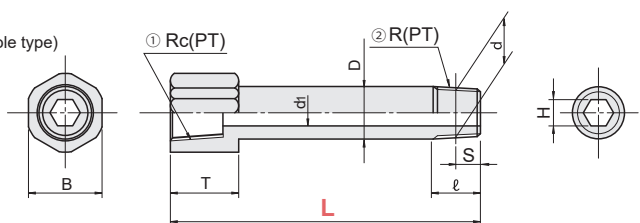

⚠ Use in atmospheric pressure 980kPa(10kgf/cm²) or lower
⚠ Hexagonal holes bored at the tapered screw ②


Thread JIS B 0203 Tapered thread for tube $R_{Rc}(PT)$

B	T	D	d ₁	Hexagonal wrench socket ○H	l	S	d	① Rc(PT)	② R(PT)	Part Number		L
										Type	No.	
14	13	10	6	○6	9	3.97	9.728	1/8	1/8	HX-JTW	1	50 ~ 150 (10mm increments)
17	16	13	8	○8	11	6.01	13.157	1/4	1/4		2	
21	17	17	10	○10	13	6.35	16.662	3/8	3/8		3	50 - 100 - 150 (Selection)




JTWf (Converting tapered screw type)

No.12 · 23

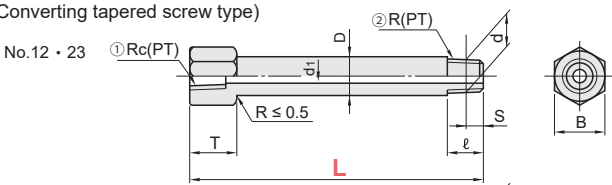

No.21 · 32

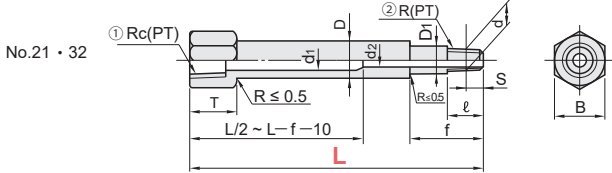

B	T	D	D ₁	d ₁	d ₂	f	l	S	d	① Rc(PT)	② R(PT)	Part Number		L
												Type	No.	
17	16	13.8	—	6	—	—	10	6.01	13.157	1/8	1/4	JTWf	12	50 ~ 200
21	17	17.3	—	8	—	—	12	6.35	16.662	1/4	3/8		23	
17	16	13.8	11	8	6	15	10	3.97	9.728	1/4	1/8		21	
21	17	17.3	14	10	8	—	—	6.01	13.157	3/8	1/4		32	



Order Example

TYPE	L
JTW2	- 100
HX-JTW2	- 80
JTWf12	- 150