


品名：油壓外藏角固虎鉗  
 型號：HW

產品說明：



MODEL	Jaw Width	Jaw Opening	Jaw Depth
HW-125	130mm	220mm	55mm
HW-160	160mm	310mm	58mm
HW-200	200mm	310mm	63mm

**FEATURE:**

- Rigid material vise body of ductile iron FCD60.
- Down thrust semi-sphere segment mechanism-eliminates jaw lift and work tilt.
- Vise bed flame hardened to HRC 45 and up takes up wear and maintain accuracy for long life.
- Three steps on jaw opening 0-110mm/100-210mm/200-310mm.
- Max. hydraulic clamping force....4,000 kgs.
- Max. hydraulic & mechanical clamping force....6,000 kg.
- 2KGS of power in this direction.
- Produce 1KG of downward.

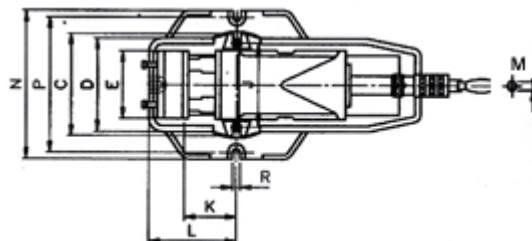

Down thrust "semi-sphere segment" mechanism-eliminates jaw lift and work-piece tilt.

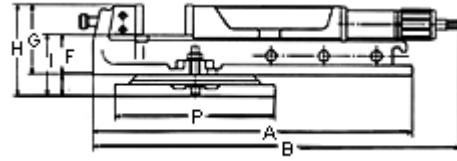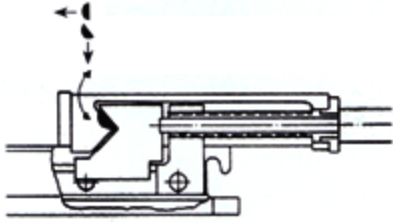

Unit/mm

MODEL	A	B		C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R
		Min	Max																
HW-125	505	570	795	190	170	130	72	127	163	106	160	75	180	14	280	266	260	32	16
HW-160	605	625	935	240	210	160	82	140	175	117	192	101	195	14	334	320	310	35	18
HW-200	700	725	1035	280	240	200	100	163	205	146	240	115	265	14	420	420	390	50	18