

Type	D	L
PU	15	500
	20	
	25	
	30	
	35	
	40	




Order Example

TYPE
PU-D20

BALL PLUNGERS

HUAN SIN COMPANY LIMITED

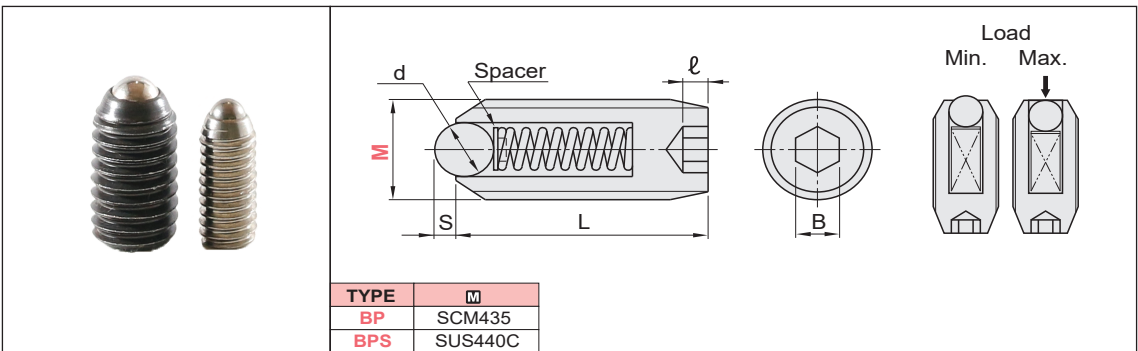

TYPE	M
BP	SCM435
BPS	SUS440C

Type	M	d	S	L	ℓ	B	For BP load (kgf)		For BPS load (kgf)	
							min	max	min	max
BP (SCM435)	3	1.5	0.5	7	1	1.5	0.10	0.20	0.15	0.30
	4	2.5	0.8	9	1.5	2	0.20	0.50	0.40	1.00
	5	3	0.8	12	2.0	2.5	0.30	1.00	0.50	2.00
BPS (SUS440C)	6	3	0.8	13	2.5	3	0.50	1.50	1.00	3.00
	8	4	1.0	15	2.5	4	0.70	2.00	1.30	4.00
	10	5	1.2	16	3	5	0.90	2.50	1.90	5.00
	12	7	1.8	20	3	6	1.00	3.00	2.00	6.00



Order Example

TYPE	M
BP-M6	