
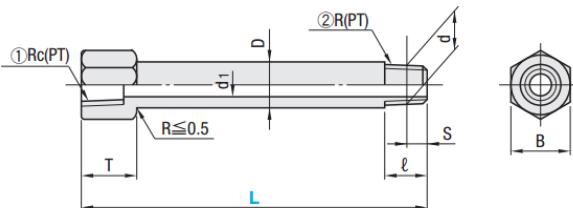


Joint Nipples

水路接頭



JTW (Brass)




JTW Brass (C3604)


Thread part JIS B 0203 Tapered thread for tubing $R_{Rc}(PT)$

Use in atmospheric pressure 980kPa (10kgf/cm²) or lower.

B	T	D	d ₁	l	S	d	① Rc(PT)	② R(PT)	Part Number		L	
									Type	No.	5mm increments	10mm increments
14	13	10.5	6	10	3.97	9.728	1/8	1/8	JTW	1	30~200	210~300
17	16	13.8	8	10	6.01	13.157	1/4	1/4		2		
21	17	17.3	10	12	6.35	16.662	3/8	3/8		3		



HX-JTW Brass (Hexagonal hole type)

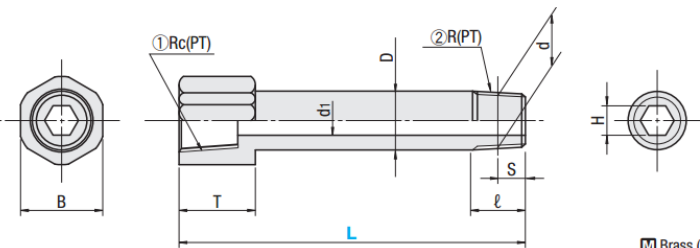


Brass (C3604)


Thread JIS B0203 tapered thread for tube $R_{Rc}(PT)$

Use in atmospheric pressure 980kPa (10kgf/cm²) or lower.
Hexagonal holes bored at the tapered screw②.

B	T	D	d ₁	Hexagonal wrench socket $\odot H$	l	S	d	① Rc(PT)	② R(PT)	Part Number		L
										Type	No.	
14	13	10	6	$\odot 6$	9	3.97	9.728	1/8	1/8	HX-JTW	1	50~150 (10mm increments)
17	16	13	8	$\odot 8$	11	6.01	13.157	1/4	1/4		2	
21	17	17	10	$\odot 10$	13	6.35	16.662	3/8	3/8		3	



JTWF (Converting tapered screw type)

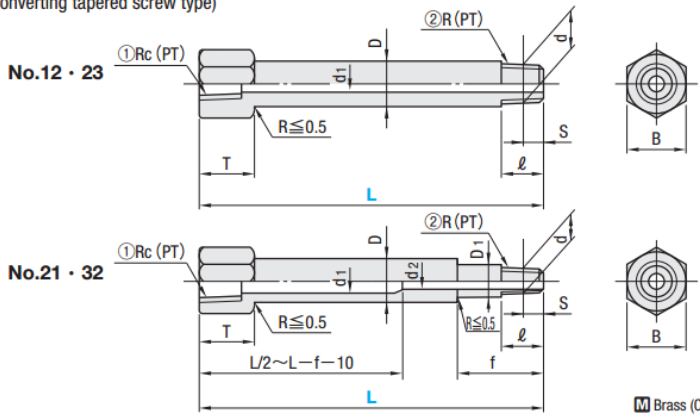

Brass (C3604)

Thread JIS B0203 tapered thread for tube $R_{Rc}(PT)$

Use in atmospheric pressure 980kPa (10kgf/cm²) or lower.

B	T	D	D ₁	d ₁	d ₂	f	l	S	d	① Rc(PT)	② RP(T)	Part Number		L
												Type	No.	
17	16	13.8	—	6	—	—	10	6.01	13.157	1/8	1/4	JTWF	12	50~200
21	17	17.3	—	8	—	—	12	6.35	16.662	1/4	3/8		23	
17	16	13.8	11	8	6	15	10	3.97	9.728	1/4	1/8		21	
21	17	17.3	14	10	8	15	10	6.01	13.157	3/8	1/4		32	