


52880 L50 Precision Sine Vise

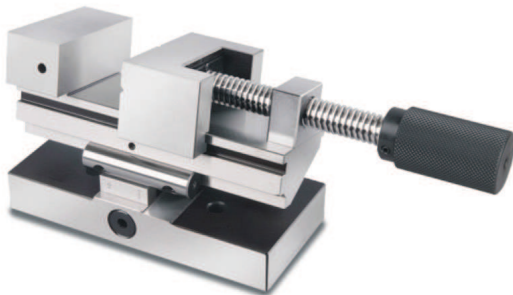


- ▶ Material:SKS
- ▶ Hardness:HRC58°~60°
- ▶ Sub-zero treatment:-185°C
- ▶ Parallelism:within 0.003mm/100mm
- ▶ Squareness:within 0.005mm/100mm
- ▶ Angle tolerance within 15 Sec..

Features :


- ▶ Made of high quality alloy tool steel (SKS3) with Sub-zero treatment.
- ▶ Suitably using in grinding, cutting, drilling, marking and measuring.
- ▶ New structure design make easier operation with higher accuracy and stability.
- ▶ The quotient is equal to the sine of the resulting angle, which can be found in a trigonometric table or by using a scientific calculator.

Spec	L50
A	160
B	73
C	93
D	30
E	63
F	33
G	80
H	45
I	M5
Max. Angle	46°
N.W	5.8kg

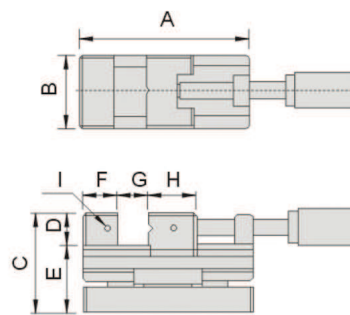

TOOL MAKER VISE

52890 CSV100 Precision Compound Sine Vise

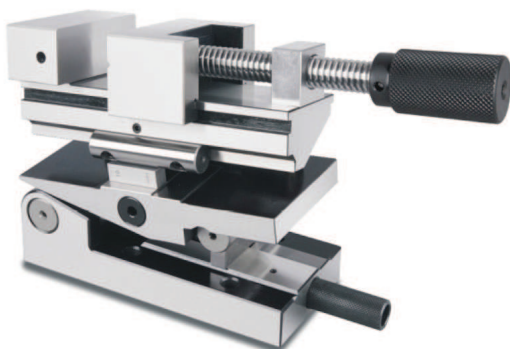

- ▶ Material:SKS
- ▶ Hardness:HRC58°~60°
- ▶ Sub-zero treatment:-185°C
- ▶ Parallelism:within 0.003mm/100mm
- ▶ Squareness:within 0.005mm/100mm
- ▶ Angle tolerance within 15 Sec..

Features :

- ▶ Made of high quality alloy tool steel (SKS3) with Sub-zero treatment.
- ▶ Suitably using in grinding, cutting, drilling, marking and measuring.
- ▶ New structure design make easier operation with higher accuracy and stability.
- ▶ The quotient is equal to the sine of the resulting angle, which can be found in a trigonometric table or by using a scientific calculator.

Spec	CSV100
A	160
B	73
C	124
D	30
E	94
F	33
G	80
H	45
I	M5
J	100
Max. Angle	46°
N.W	7.5kg

