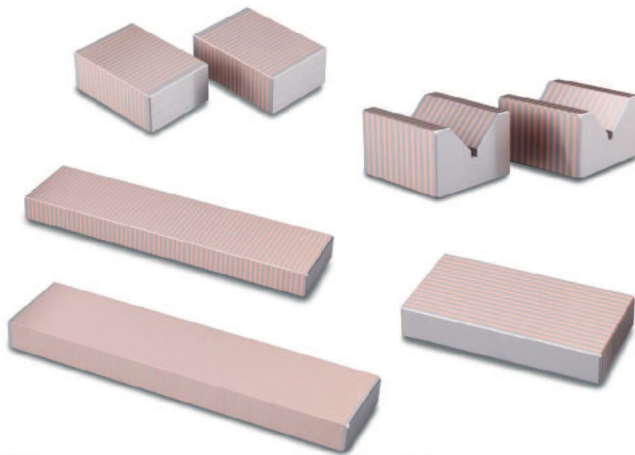
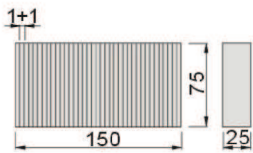
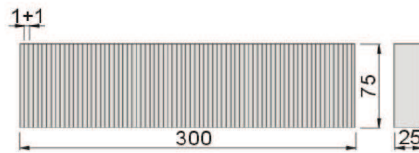

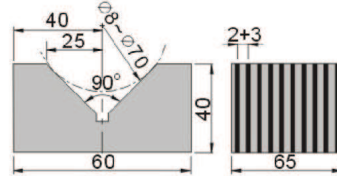



**54020**
**HT**
**Magnetic Induction Block**

**Features :**


- ▶ Made of iron and copper with welding fixed, can cut in any shapes and distortion free.
- ▶ It will be magnetized after inducted on any magnetic chuck applying for as plate or 45° fixture and used as auxiliary tool for holding round, thin or shapes that difficult to hold.
- ▶ There are many types induction blocks for selection to fulfill your processing needs.
- ▶ 20% magnetic force reduced when thickness over 25mm.


**54020-01 HTW-150**

**54020-02 HTW-300**

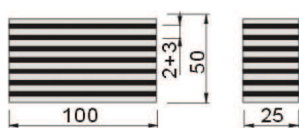**54020-03 HT-75**

**54020-04 HTV-60**

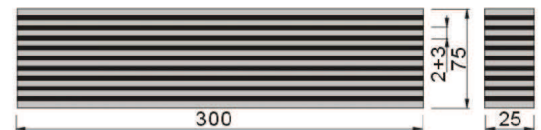**54020-05 HT-100**

**54020-06 HT-150**

**54020-07 HT-300**

**54020-08 HTL-100**

**54020-09 HTL-150**

**54020-10 HTL-300**

Unit:mm

Order No.	Model	L	W	H	Pole pitch	Qty	N.W.
54020-01	HTW-150	150	75	25	2(1+1)	1 PCS	2.2kg
54020-02	HTW-300	300	75	25	2(1+1)	1 PCS	4.4kg
54020-03	HT-75	75	45	22	5(2+3)	2 PCS	1.2kg
54020-04	HTV-60	65	60	40	5(2+3)	2 PCS	2.5kg
54020-05	HT-100	100	50	25	5(2+3)	2 PCS	2.0kg
54020-06	HT-150	150	75	25	5(2+3)	1 PCS	2.2kg
54020-07	HT-300	300	75	25	5(2+3)	1 PCS	4.4kg
54020-08	HTL-100	100	50	25	5(2+3)	2 PCS	2.0kg
54020-09	HTL-150	150	75	25	5(2+3)	1 PCS	2.2kg
54020-10	HTL-300	300	75	25	5(2+3)	1 PCS	4.4kg